

Bag Filtration System- Technical Information

Technical Specifications

Maximum Operating Limits

Pressure: 150 psi@73°F (7.03kg/cm³)

Temperature (filter house only)

PVC: 140°F (60°C)

CPVC: 210°F (99°C)

Flow Rate

Type 1 60 gpm (clean bag)

Type 2 125 gpm (clean bag)

Inlet / Outlet Pressure

Differential: 15 psi

STANDARD HOUSING INFORMATION

Material of Construction: PVC or Corzan® CPVC

Inlet / Outlet Connection: 2" NPT or Flanged

Drain Connection: 2" NPT


Filter Bag Media (not included)

Type I: Single Length 7 x 16


Type II Double Length 7 x 32"

Seals Viton®


Adjustable Leg Stand All Plastic

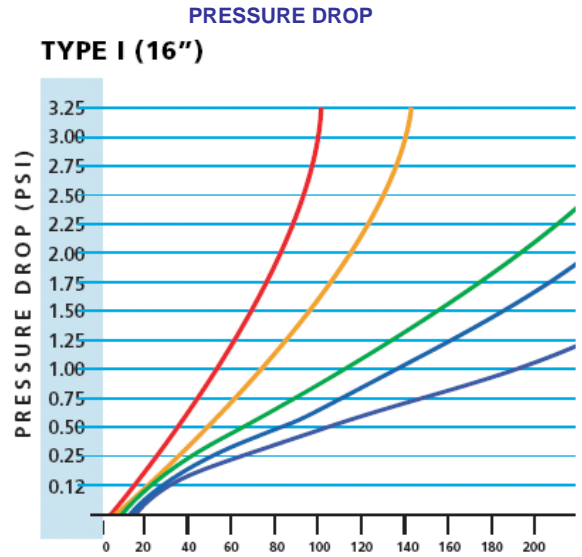


OPERATING TEMPERATURE/PRESSURE

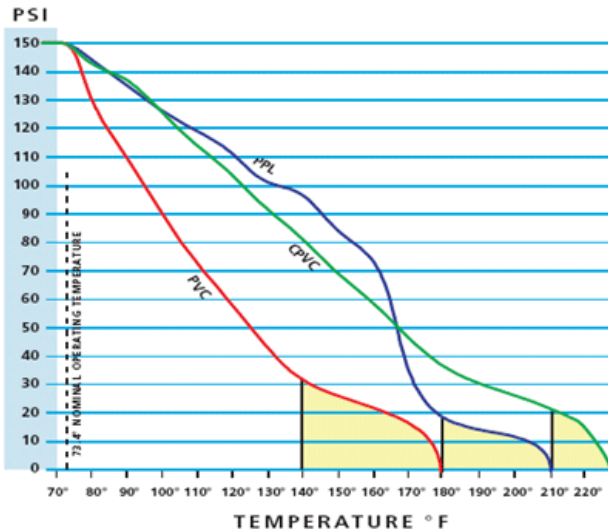

TYPE II (32")

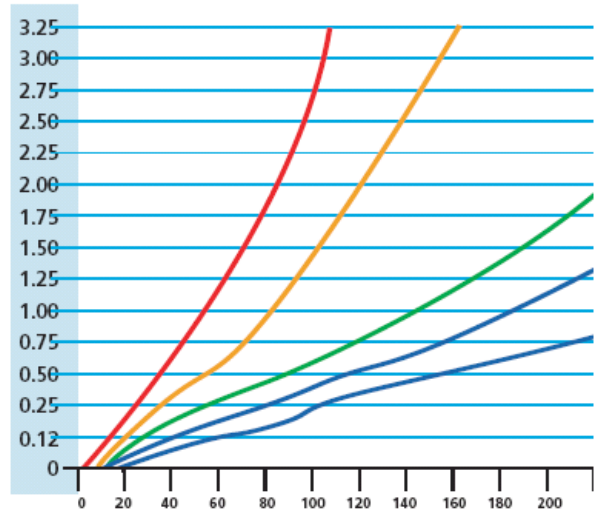

Bag Filtration System- Dimensions

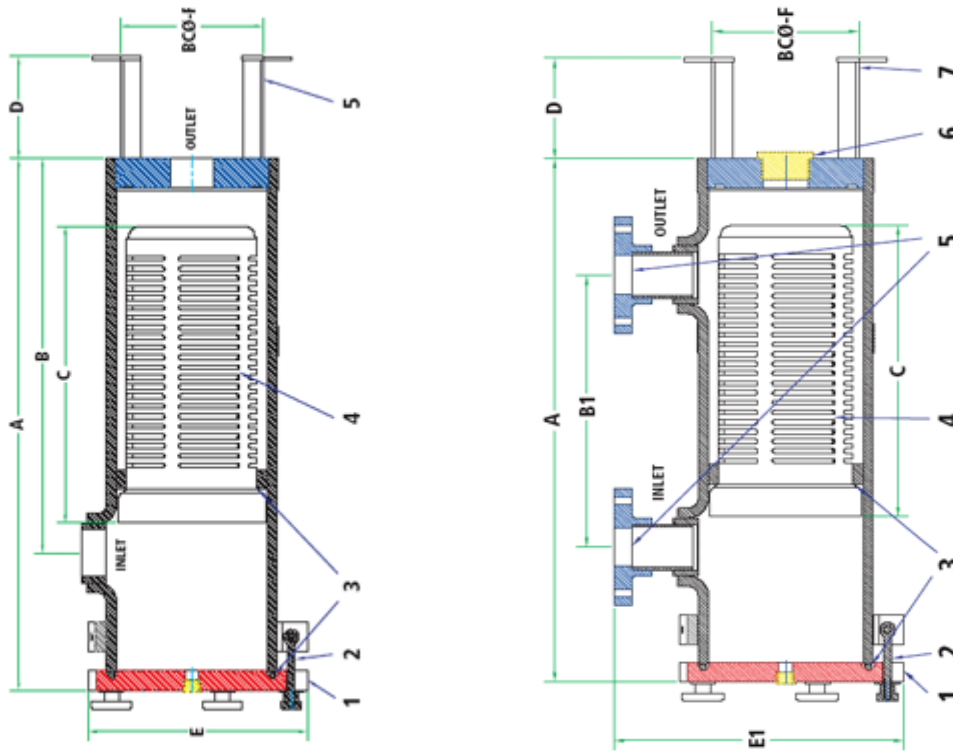

Dimensional Data

Inches (mm)	A	B	B1	C	D	E	E1	F	Weight	Cv
PVC TYPE-1 W/ 2"	26.75 (679)	20 (508)	14 (356)	15 (381)	5-15 (127-381)	11.5 (292)	14.5 (368)	11.75 (299)	37 lb (13.75 kg)	73
PVC TYPE-2 W/ 2"	42.75 (1086)	36 (914)	30 (762)	31 (787)	5-15 (127-381)	11.5 (292)	14.5 (368)	11.75 (299)	50 lb (18.5 kg)	80
CPVC TYPE-1 W/ 2"	26.75 (679)	20 (508)	14 (356)	15 (381)	5-15 (127-381)	11.5 (292)	14.5 (368)	11.75 (299)	40 lb (14.75 kg)	73
CPVC TYPE-2 W/ 2"	42.75 (1086)	36 (914)	30 (762)	31 (787)	5-15 (127-381)	11.5 (292)	14.5 (368)	11.75 (299)	53 lb (19.75 kg)	80